

MP-4815

› Wall Mount Display



Features



- Ultra-thin LCD panel
- 15" backlight LCD display
- IP54 front display
- On-screen display easy to use
- Support resistive & PCAP touch
- Built-in 2W speaker (Optional)
- Audio available for IPC applied computer (Optional)
- 5M pixel USB camera module (Optional)
- 2D barcode scanner module (Optional)
- MSR / RFID / Fingerprint USB interface (Optional)
- VESA mount kit selectable (Optional)
(VESA 100 x 100 & 75 x 75 selectable)

Specifications

Model	MP-4815
Customer (2nd) Display	15" XGA LCD (250 cd/m ²)
Display Resolution	1024 x 768 (XGA)
Font Size	367(W) x 37.8 mm
Dimensions (Panel)	367 x 37.8 x 299.3 mm (W x H x D)
Viewing Angle	Horizontal 80°, Vertical 70°
Add-ons	Max. 4-USB device support
I/O Ports	VGA DVI-I cable (support DVI-D signal only) USB Line In (for Audio & Speaker)
Language	English, French, Deutsch, Italiano, Spanish, Japanese, Chinese (Traditional)
Power Supply	DC12V power jack (9-16V power input)

Environment


EMC & Safety	CE / FCC
Operating Temp.	0°C~40°C (32°F~104°F)
Storage Temp.	-20°C~60°C (-4°F~140°F)
Humidity	20%~90%

Application


- Retail
- Food Service
- Information
- Hospitality

Dimensions

VESA Mount Kit 1

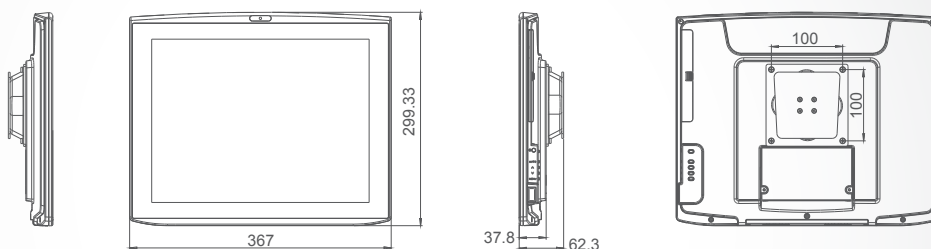

VESA Mount Kit 2

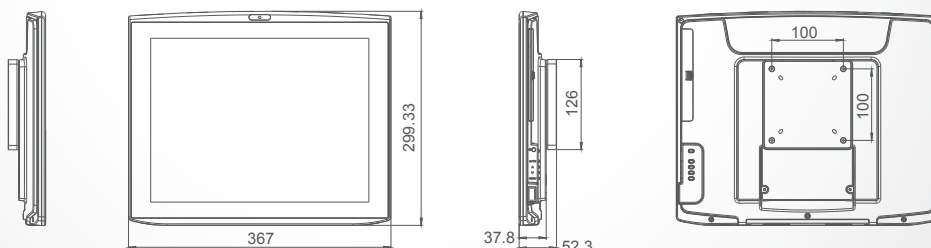

unit: mm

*All information contained in this document is subject to change without prior notice. Please log on www.protech.com.tw to acquire latest information.